



IN USA, Inc.
100 Morse Street • Norwood, MA 02062 • USA
Tel: 800-798-4029 • 781-444-2929 • Fax: 781-444-9229
www.inusacorp.com

Model IN-2000-L2-LC-W1 Analyzer

DISSOLVED OZONE ANALYZER



The Model **IN-2000-L2-LC-W1** uses UV absorption to continuously measure ozone concentrations in the liquid phase. It uses the stripping column method with advanced electronics design, to deliver highly accurate and stable readings of dissolved ozone. The model **IN-2000-L2-LC-W1** is typically used in measure dissolved ozone in drinking water, wastewater and DI water applications in a wide range of industries.

Applications:


- Drinking Water Plants
- Bottling Plants - Water or Beverage
- Pharmaceutical Plants
- Waste Water Treatment Plants
- Others

Features:

- Stripping Column
- UV Absorption technique
- Highly stable optical system
- Microprocessor based technology
- Dual field programmable alarms
- No consumables
- Reliable, repeatable and accurate

Specifications

Model IN-2000-L2-LC-W1

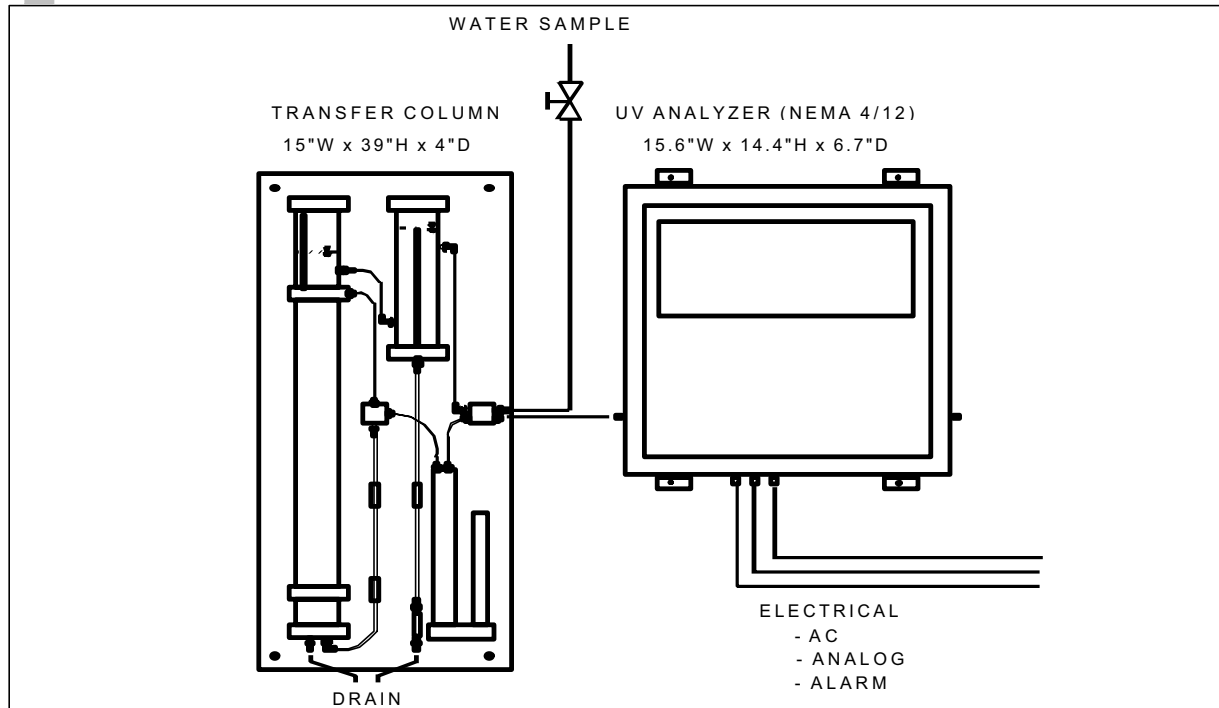

Measuring Principle:	Transfer Method (transfer ozone from liquid to gas) followed by absolute determination by UV absorption
Measuring Range:	0-1, 0-2, 0-3, 0-5, 0-10, >10ppm *
Resolution:	0.001 ppm (ranges 0-1 to 0-10ppm) 0.01ppm (range >10 ppm)
Linearity:	Better than 99% throughout range
Zero Drift:	Better than 0.002 ppm per month, non cumulative
Standard Alarms:	Two field programmable alarms with form C relay contacts (SPDT, 5A 250 VAC resistive)
Diagnostic Features:	Continuous internal diagnostics with error messages instrument error relay
Options:	Low flow alarm relay, RS-422 Isolated 4-20 mA

* Higher concentrations available

Analog Outputs:	4-20 mA and 0-10 VDC standard.
Digital Outputs:	RS-232 interface
Supply Voltage:	100-240 VAC 50/60 Hz
Water Flow Rate:	1.0 LPM (Gravity fed)
Gas Flow Rate	1.0 LPM
Connections:	1/4" compression fittings (gas) 1/4" compression or 3/8" barb (water)
Configurations:	Nema-4X IP65 Wall Mount; 19" Rack Mount, others available
Dimensions:	(H x W x D) Nema-4X Weatherproof: 15.6 x 14.4 x 6.7 in. (396.9 x 365.1 x 169.9 mm.) Rack Mount: 5.25 x 19.00 x 18.18 in. (133.3 x 482.6 x 461.8 mm.)
Operating Conditions:	5-45°C, 0-95% RH non-condensing

Specifications subject to change without notice



IN USA, Inc. • 100 Morse Street, Norwood, MA 02062 • USA
1-800-798-4029 • Tel: 781-444-2929 • Fax: 781-444-9229 • Website: www.inusacorp.com
© 2007 IN USA, INC. - ALL RIGHTS RESERVED, COMPANY CONFIDENTIAL - DO NOT REPRODUCE

Rev. 9424-P